


MS2-W 系列弹簧式防水中微动

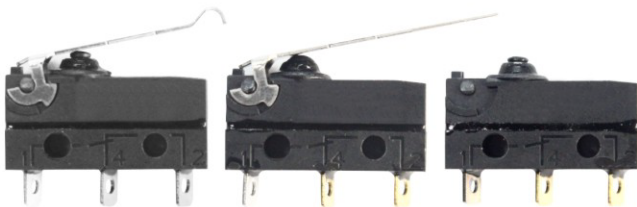

产品特性

- ◎ 紧凑型设计
- ◎ 长寿命开关
- ◎ 多种连接式
- ◎ 各种操作方式
- ◎ IP67防水开关

典型应用


- ◎ 移动设备
- ◎ 污水泵
- ◎ 恒温控制
- ◎ 精密机器
- ◎ 空调器

产品规格

- ◎ 标称值：0-5A
- ◎ 电气寿命：10K Cycles
- ◎ 绝缘电阻：100MΩ min.
- ◎ 抗电强度：1000 Vac
- ◎ 工作温度：-40°~120°(不带线)
-40°~85/105(基于电线规格)
- ◎ 操作力：见下表
- ◎ 产品组装：力矩2.3 in/16s max

材质


- ◎ 外壳：PBT
- ◎ 本体：PBT
- ◎ 按钮：PBT
- ◎ 触点：银 (0.5A)
镀金 (0.1A)
- ◎ 端子：黄铜
- ◎ 杠杆：不锈钢

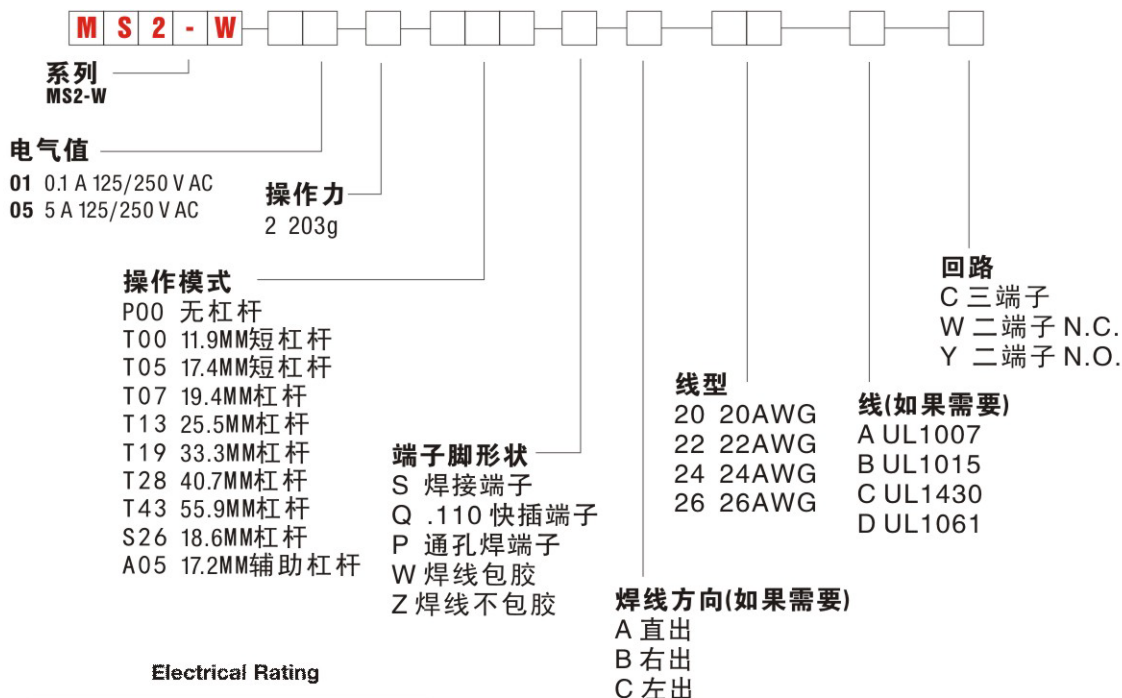

Electrical Rating

Option Code	UL 61058-1	
01	0.1 A 125/250 V AC	NA
05	5 A 125/250 V AC	6 A 250 V AC

系 列

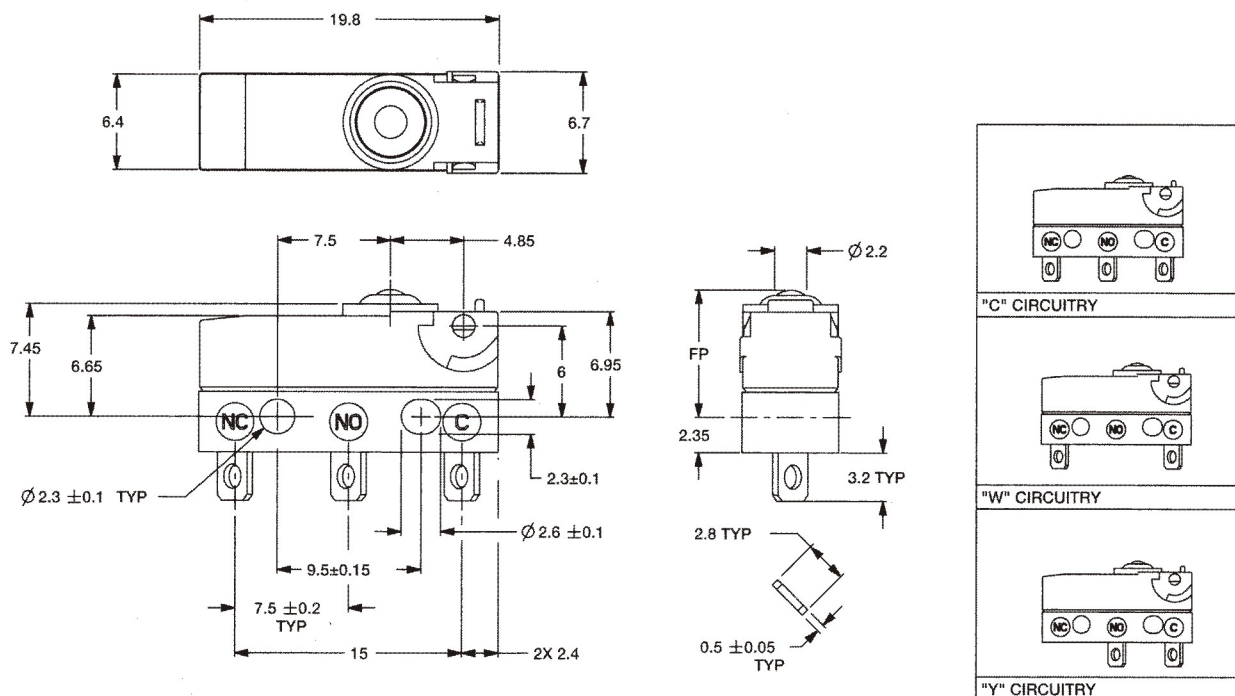


电 气 值

RoHS COMPLIANT *	RoHS COMPATIBLE *	OPTION CODE	ELECTRICAL RATING
YES	YES	05	5 AMP, 125/250 V AC
YES	YES	01	0.1 AMP, 125/250 V AC

操 作 力


OPTION CODE	OPERATING FORCES (grams)
2	203 g. max.




Dimensions are shown: inches(mm)
Specifications and dimensions subject to change

操作模式


P00




T19




T07




A05




T00




T28




T13








S26



T05



T43

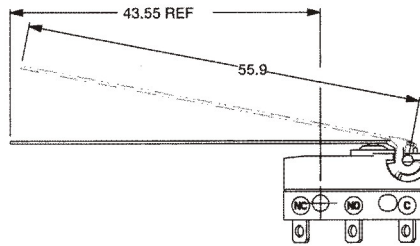


ACTUATOR OPTION CODE	A	B	C	D	E	DIFFERENTIAL MOTION (MAX)	OPERATING FORCE (MAX)	RELEASE FORCE (MIN)
	LENGTH OF LEVER	OVER TRAVEL (MIN)	PRE TRAVEL (MAX)	OPERATING POSITION	FREE POSITION (MAX)	203	203	203
P00	N/A	0.6	1.2	8.4 ± 3	9.9	0.2	203	50
T00	11.9	0.6	3.2	8.8 ± 9	11.1	0.5	98	21
T05	17.40	0.9	4.3	8.8 ± 1.1	12	0.6	82	16
T07	19.40	1	4.8	8.8 ± 1.2	12.4	0.7	66	13
T13	25.5	1.6	6.3	8.8 ± 1.6	13.5	0.9	54	11
T19	33.3	1.95	8	8.8 ± 2.0	15	1.75	40	5
T28	40.7	2.1	10.1	8.8 ± 2.6	16.3	2.3	39	8
T43	55.9	2.9	13.8	8.8 ± 3.5	19.1	3.6	33	7
S26	18.6	1	4.6	10.7 ± 1.2	14.1	0.65	68	14
A05	17.20	0.9	4.3	14.5 ± 1.1	17.7	0.6	72	15




Dimensions are shown: inches(mm)
Specifications and dimensions subject to change

端子脚形状


S SOLDER

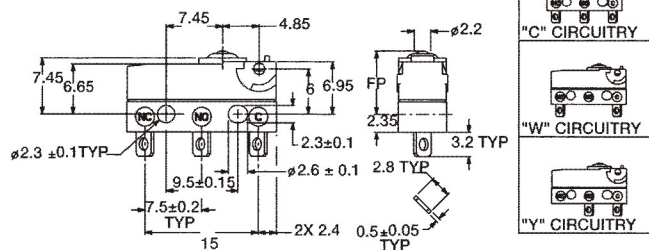


Q QUICK CONNECT 2.8mm / 0.110"

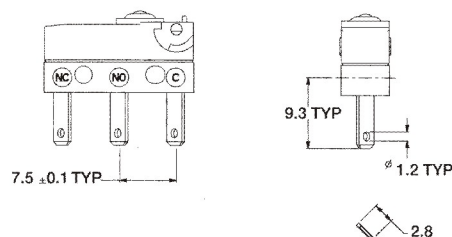

P PC THRU HOLE

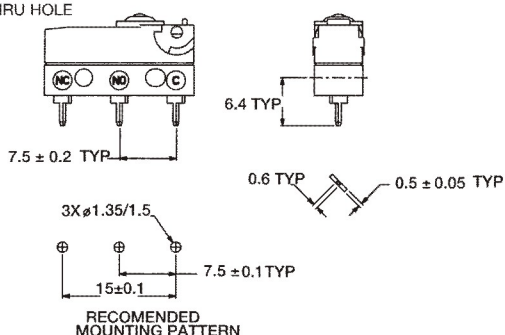


Z or W "A" WIRE ORIENTATION

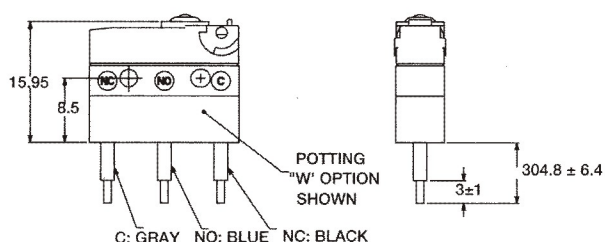


焊线包胶类型


Z or W "B" WIRE ORIENTATION
"Y" OR "W" CIRCUITRY

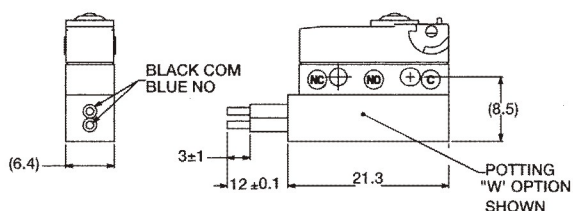


Z or W "C" WIRE ORIENTATION
"Y" OR "W" CIRCUITRY

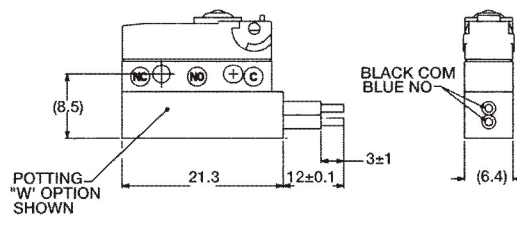

Z or W "B" WIRE ORIENTATION
"C" CIRCUITRY

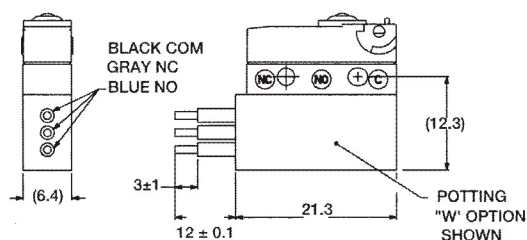


Z or W "C" WIRE ORIENTATION
"C" CIRCUITRY

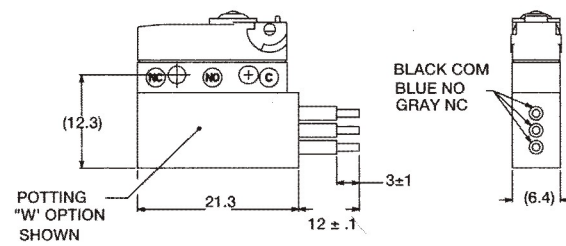

回路

- C** SPDT (Single Pole, Double Throw)
- W** SPST N.C. (Single Pole, Single Throw, Normally Closed)
- Y** SPST N.O. (Single Pole, Single Throw, Normally Open)



Dimensions are shown: inches(mm)
Specifications and dimensions subject to change