



DIMENSION A (General tolerance: ± 0.3)

POSITIONS	2	3	4	5	6	7	8	9	10
A	3.67		6.21		8.75		11.29		13.83


YED DIMENSIONS Unit:mm

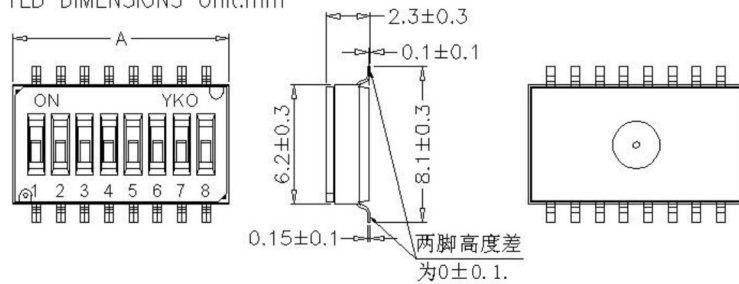


ITEM	DES	MATERIALS	TREATMENT
1	COVER	ENGINEERING PLASTICS	BLACK
2	BASE	ENGINEERING PLASTICS	BLACK
3	KEY	ENGINEERING PLASTICS	WHITE
4	TERMINAL	ALLOY COPPER	PLATING GOLD

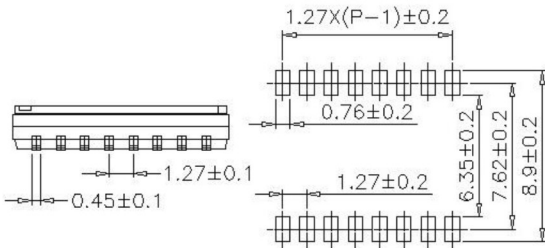

P. C. B LAYOUT

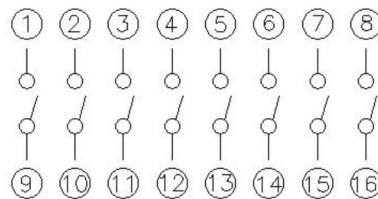

CIRCUIT DIAGRAW

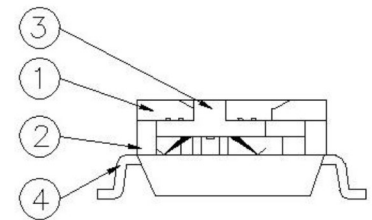

CONSTRUCTION

Tube Package

ROHS PART NUMBER	NO. POS.	DIM. 'A'	DIM. 'B'	QUANTITY PER TUBE
DP1-B01H0SB1	1	2,40	NA	NA
DP1-B02H0_B1	2	3,67	1,27	125
DP1-B04H0_B1	4	6,21	3,81	70
DP1-B06H0_B1	6	8,75	6,35	50
DP1-B08H0_B1	8	11,29	8,89	40
DP1-B10H0_B1	10	13,83	11,43	30

Schematic

SPST


Tape & Reel Package

ROHS PART NUMBER	NO. POS.	DIM. 'W'	QUANTITY PER REEL
DP1-B01H0SB1R*	1	16,0	2500
DP1-B02H0_B1R	2	16,0	2000
DP1-B04H0_B1R	4	16,0	2000
DP1-B06H0_B1R	6	16,0	2000
DP1-B08H0_B1R	8	24,0	2000
DP1-B10H0_B1R	10	24,0	2000



Dimensions are shown: inches(mm)
Specifications and dimensions subject to change

DP1-B 1.27mm拨码开关



产品特性

- 多触点提升导通性能
- 超声波焊接密封增强防尘效果
- 电流值 24VDC 25mA (运动状态)
50VDC 100mA (静止状态)
- 端子间距 1.27mm

典型应用

- 手持式电子设备
- 便携式计算机及相关设备
- 仪表及控制相关设备

产品规格


- 开关线路：单极单通 1,2,4,6,8,10档共6个选项
- 标称值：24 VDC 25mA (拨动状态)
50 VDC 100mA(静止状态)
- 机械与电气寿命：1000 Cycles
- 接触电阻：100MΩ
- 绝缘电阻：100MΩ@100 VDC min.
- 抗电强度：300 Vac min.
- 存储温度：-40°~85°
- 工作温度：-40°~85°
- 操作力：4.9N max.
- 可焊性：MIL-STD-202F 208D

包装方式

- IC管式或卷带包装

材质

- 上盖&底壳：PPS(UL 94V-0)
- 按钮：LCP(UL 94V-0)
- 接触片：镀铜镀金
- 端子：黄铜镀金
- 密封：薄膜片

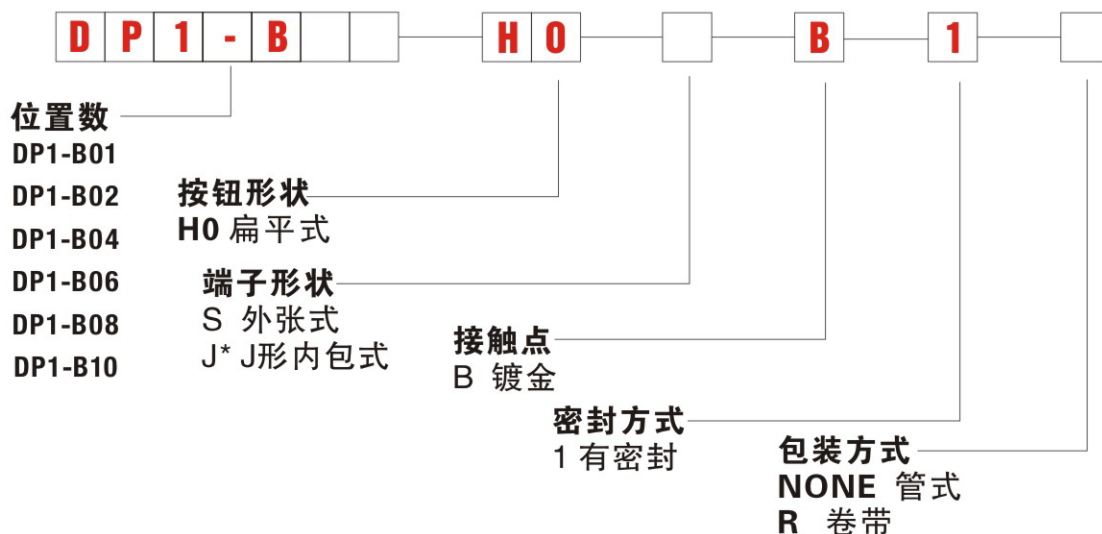

*DP1-B 01H0JB1R is not available, DP1-A01 only offered in tape & reel



Third Angle
Projection

Dimensions are shown: inches(mm)
Specifications and dimensions subject to change